


# **B6x - High Capacity, Extreme Speed, and Super Value**

B6x Point-to-Point (PTP) Backhaul Radio 5.15–6.425 GHz





The Mimosa B6x is one of the industry's fastest unlicensed backhaul solutions. It's ideal for short to medium range relay and tower links, custom-engineered collocation, and unlicensed 5.15-6.425 GHz spectrum. It's modular, with the ability to connect N5-X compatible twist on antennas (dish—not included). With the latest in wireless technologies and access to new 6 GHz bands, the B6x achieves extremely low latency with speeds of up to 3.0 Gbps and high reliability with new noise fighting features.

# Fast and Flexible

Deliver industry-leading unlicensed point-to-point connectivity together with the N5-X antenna, offering up to 3.0 Gbps (IP) across various models (12 to 30+dBi). Benefit from 320 MHz aggregate channel capacity and GPS Sync mode for peak performance flexibility.

# OFDMA Modulation

Unlicensed spectrum interference mitigation using OFDMA modulation coupled with dual-channel and auto-everything technology.

# Ultra Rugged

Carrier-grade IP67 design allows the B6x to withstand the harshest of environmental conditions.

# Extended Frequency

Rise above the noise with extended frequency support from 5.15–6.425 GHz. N5-X antennas also offer best-in-class sidelobe noise rejection.

# GPS Sync for Rapid Expansion

Collocate in close proximity with other Mimosa GPS enabled radios to quickly expand network.

## Monitor With Ease

Assessing link health and identifying potential problems has never been easier. Links are instantly monitored from Mimosa Management Platform.



# **Technical Specifications**

#### **Performance**

Max Throughput:

Up to 3.0 Gbps IP aggregate UL/DL (3.4 GbpsPHY)

• Wireless Protocols:

TDMA, TDMA-FD, Auto-TDD

Low Latency:

<1 ms in auto mode

#### Radio

Modulation: 4x4 MU-MIMO; OFDMA 1024QAM

Bandwidth: Single or dual 160 MHz channels , 320

MHz aggregate channel capacity

- Frequency Range: 5150-6425 MHz Restricted by country of operation
- Max Output Power: 27 dBm
- Sensitivity (MCS 0):
  - o -87 dBm @160 MHz
  - o -90 dBm @ 80 MHz
  - o -93 dBm @ 40 MHz
  - o -96 dBm @ 20 MHz

#### **Power**

- Max Power Consumption: 30 W
- System Power Method: PoE Port, or via the separate DC port
- System Lightning & ESD Protection: 6 kV
- PoE Power Supply:

Passive POE compliant, 48–56 V (PoE injector not included)

# **Physical**

• Dimensions:

Height: 290 mm (11.4") Width: 167mm (6.6") Depth: 89mm (3.5")

• Weight: 1.7 kg (3.7 lbs)

• RF Connector Type: N5-X twist-on

• Enclosure Characteristics:

Die-cast aluminum

 Mounting: Requires two standard pole straps for mounting to 30 mm (1.2") to 90mm Bracket with + - 20 degrees elevation adjustment is needed.

#### **Environmental**

• Outdoor Ingress Protection Rating: IP67

• Operating Temperature: -40°C to +55°C (-40°F to 131°F)

Operating Humidity: 5 to 100% condensing

• Operating Altitude: 4,420 m (14,500') maximum

• Shock and Vibration: ETS 300-019-2-4 class 4M5

#### **Regulatory and Compliance**

· Approvals:

(Pending - target Q1-2025)

• RoHS Compliance: Yes

• Safety: (Pending - target Q1-2025)

#### **Features**

 Dual SFP+: 10 Gbps Fiber via SFP+ cage. Single or multi-mode compatibility. (SFP insert modules not included)

Gigabit Ethernet: 10/100/1000 BASE-T

• Dual Link Operation:

Dual 2x2 radios operating with independent asymmetric channel and link autoadaption for each radio channel pair; Automatic load balancing of traffic across 2 non-contiguous channels (4 total MIMO streams)

 Management Services: Mimosa Cloud, MMP; SNMPv2 & Syslog legacy monitoring; HTTPS; HTML 5 based Web UI

#### • Smart Spectrum Management:

Active scan monitors/logs ongoing RF interference across channels (no service impact); Dynamic auto-optimization of channel and bandwidth use

- Security: 128-bit AES PSK with hardware acceleration
- QoS: 4 classes of QoS, with user configurable priority
- queuing, weighted fair queuing, MIR, CIR, and rate limiting
- GPS Location: GNSS-1 (GPS + GLONASS)
- Collocation Synchronization: 1PPS GPS TX/RX synchronization for collocated co-channel radios; Adjustable up/downstream bandwidth ratio
- Part Number: 100-00116



<sup>&</sup>lt;sup>4</sup>Feature available starting Q3' 2025




# N5-X Modular Antenna Options for the B6x

Product	B6x (Without antenna)	N5-X12 (horn)	N5-X16 (horn)	N5-X20 (dish)	N5-X25 (dish)
Part Number	100-00116	100-00086	100-00087	100-00088 - 2PK 100-00090 - 8PK	100-00091 - 8PK
Gain	8 dBi Native	12 dBi	16 dBi	20 dBi	25 dBi
Polarization	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°
Beamwidth, Symmetric (3 dB)	58°	38°	22°	12°	8°
Front-to-Back Ratio (min)	21 dB	29 dB	50 dB	35 dB	40 dB
Front-to-Side Ratio (min)	21 dB	27 dB	43 dB	37 dB	> 45 d
Weight		0.16 kg (0.35 lbs)	0.61 kg (1.35 lbs)	0.77 kg (1.70 lbs)	0.98 kg (2.15 lbs)
Dimensions		Diameter: 76 mm (2.99") Depth: 67 mm (2.63")	Diameter: 160 mm (6.29") Depth: 116 mm (4.57")	Diameter: 270 mm (10.63") Depth: 83 mm (3.27")	Diameter: 429 mm (16.89") Depth: 116 mm (4.57")
Mount		Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on
Wind Survivability		200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)
Wind Loading		3.27 kg @ 160 km/h (7.20 lbs @ 100 mph)	5.13 kg @ 160 km/h (11.30 lbs @ 100 mph)	14.55 @ 160 km/h (32.07 lbs @ 100 mph)	36.26 kg @ 160 km/h (79.95 lbs @ 100 mph)




# **Polar Plots and Gain Across Frequencies**



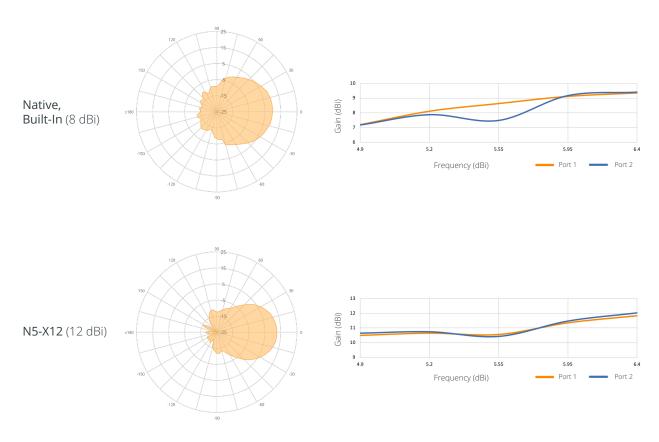



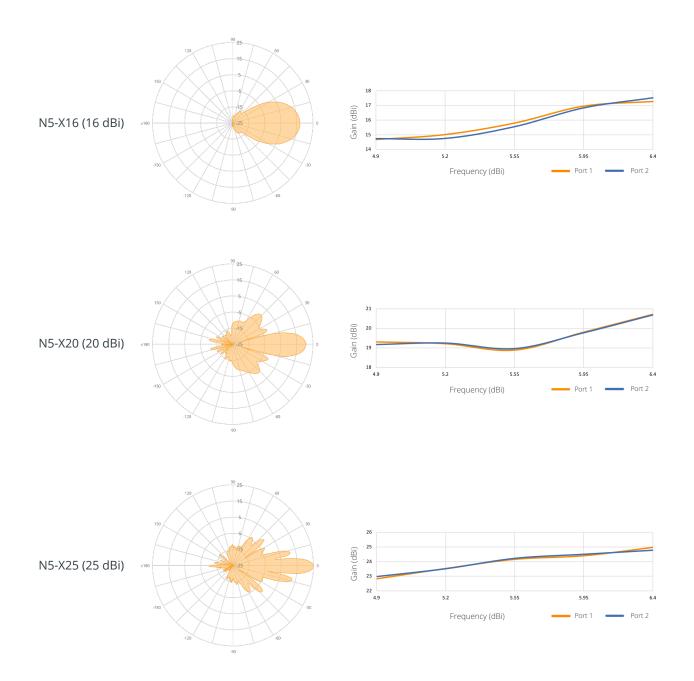

Mimosa Networks, a wholly owned subsidiary of Radisys, is the global technology leader in wireless broadband solutions, enabling service providers to connect dense urban and hard-to-reach rural homes at a fraction of the cost of fiber. Mimosa Networks was acquired in 2023 by Radisys, the global leader in open telecom solutions. DS-2025-01

